


Rev	Change note (from PDMW)	Changed	Date
01	First release acc to revised company standard.	SHM	2016-02-01

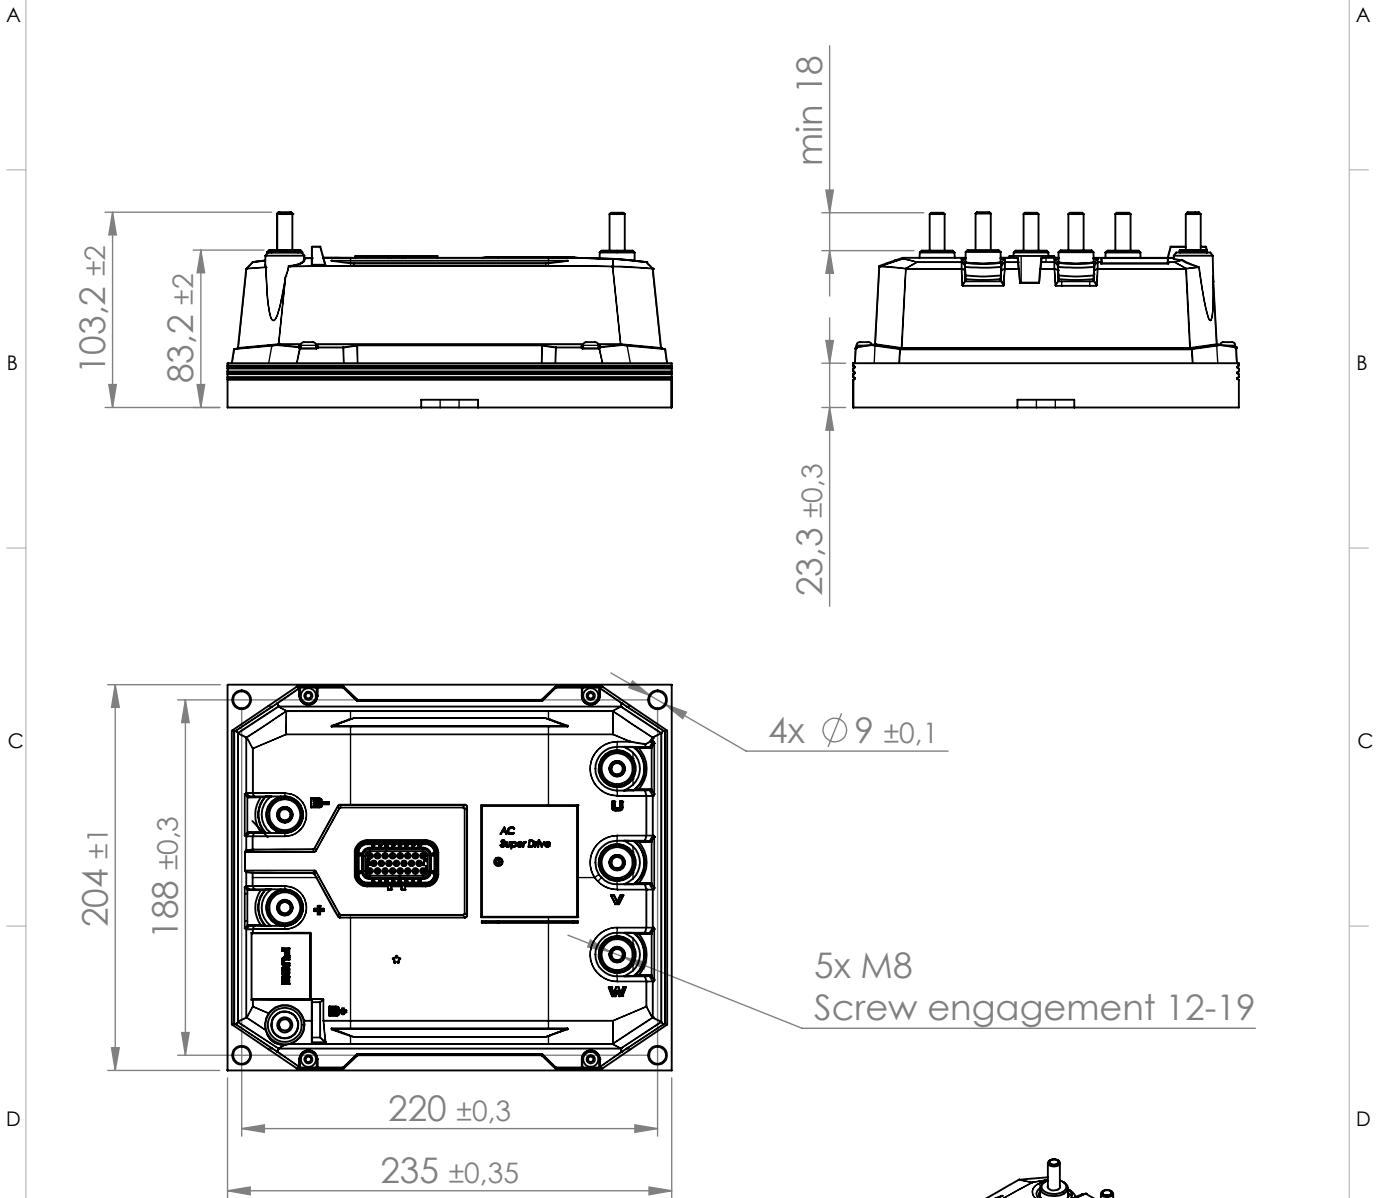

**Drawing notes:**

1. See 3D-model for further details.
2. I/O connector versions:
  - a. 23 pos AMP seal blk
  - b. 35 pos AMP seal blk
3. Weight +/- 10%.
4. Fuse connection (M8) is optional.
5. Studs (5x M8) at terminals are optional.

Material:

Surface Treatment:

Description

**Standard ACS M/L/XL Heatsink C**

Status	Initial Designer	Weight	General Tolerance	General Roughness	Units
released	CEM	5.3 kg		Ra:	mm

Document No.	Rev	Page No.	Projection View
MC000809B	01	1(1)	